

# VAPORESSO TARGET PM80

User Manual


**BUY**  
**Vaporesso Target PM80 Pod Kit**

**TARGET PM80 GTX Replacement Coils**

# ENGLISH

Thank you for choosing Vaporesso product. Please read this instruction carefully before use to ensure a perfect experience. If there is any additional requirement about this product, please consult the local agent or contact us through our website: [www.vaporesso.com](http://www.vaporesso.com)

## EXPLODED VIEW



## SPECIFICATIONS

Dimensions	102 x 33.4 x 24.8mm
POD Capacity	4ml/2ml(TPD)
Coils & Suggested Wattage	GTX 0.2Ω MESH Coil (45-60W) GTX 0.3Ω MESH Coil (32-45W)
Battery Capacity	Built-in 2000mAh
Output Power	5-80W
Charging Current	DC 5V/2A, Micro USB
Battery Display	0.96" TFT Screen

## PACKING LIST

- 1 x TARGET PM80 Battery
- 2 x TARGET PM80 POD (4ml/2ml TPD)
- 1 x GTX 0.2Ω MESH Coil
- 1 x GTX 0.3Ω MESH Coil
- 1 x USB Cable
- 1 x User Manual
- 1 x Warranty Card
- 1 x Reminder Card

## USE INSTRUCTION

### 1. Install the Coil

Take out the coil from the package of the TARGET PM80, and insert the coil firmly into the POD.

### 3. Fill the E-liquid

- Uncover the silicone plug at the bottom of the POD;
- Gently insert the e-liquid filling bottle tip to the filling slot and press down to squeeze the e-liquid through the slot.
- Please wait for 5 minutes for the e-liquid to soak into the coil.



### 4. Power on the Device

Click the power button 5 times in 2 seconds to power on or power off the device.

### 5. Power Adjustment

TARGET PM80 is using the powerful GTX coil platform, and the suggested power need to be noticed before start vaping.

GTX MESH Coils	GTX 0.2Ω MESH	GTX 0.3Ω MESH
<b>Suggested Power</b>	45-60W	32-45W

### 2. Replace the Coil

1) Please confirm the POD is empty before coil replacing.

2) Pull out the used coil



3) Install a new coil firmly



Incorrect Installation



Correct Installation

## 6. Start Vaping

Press the power button to enjoy extraordinary vaping experience.

## 7. Charge the Battery

After connecting the USB cable to the battery, the battery indicator and remaining charging time will be showed on the screen.

## 8. Settings

**SYSTEM LOCK/UNLOCK:** Press power button 3 times.

**Press “+”and “-” buttons together to enter the setting interface.**

SMART VW: The power of device will be adjusted automatically according to the coils;

VW: Wattage adjustment mode;


VV: Voltage adjustment mode;

PUFF: The 7 days vaping information will be recorded in the puff counter;

DEFAULT: Restore factory settings;

THEME: Theme Color Selection



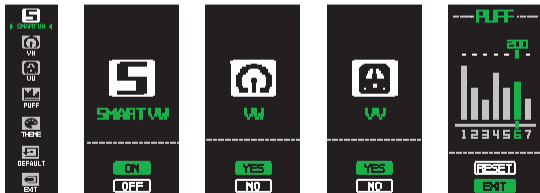



EXIT: Back to main interface.



## PROTECTIONS

No.	Protections	Situation
①	USB Input Protection	The USB input voltage is too high.
②	Low Battery Protection	The battery drops too low.
③	No Load Protection	The device detects no cartridge on the battery.
④	Short-circuit Protection	The device detects a short-circuit.
⑤	Overtime Protection	Constantly vape for more than 10 seconds.
⑥	Overheat Protection	The device detects an overheated PCBA.

 <p>① USB INPUT PROTECTION</p>	 <p>② LOW BATTERY</p>	 <p>③ CHECK CARTRIDGE</p>	 <p>④ SHORT ATOMIZER</p>	 <p>⑤ OVER TIME</p>	 <p>⑥ OVER HEAT</p>
---	--	--	---	--	---

## CAUTIONS

1. Please turn off the device when it is not in use.
2. Do not leave the charging device unattended.
3. Do not drop, throw or abuse your device, which may cause damage.
4. Please use a standard USB output charger with proper charging current and voltage range.
5. Keep away from the water or any flammable gas, liquid .
6. Do not expose the device to direct sunlight, dust, moisture or mechanical shock.
7. Do not expose the device to extreme temperature. (Recommended temperature range: -10~60°C /14~140 °F while using and -10~45°C /14~113 °F while storing).
8. EEE Recycling: The product should not be treated as household waste, instead, it should be

handed over to the applicable collection point for the recycling of electrical and electronic equipment.

9. Battery Recycling: The product battery should not be treated as household waste, instead, it should be handed over to the applicable used battery collection point for recycling.

10. Only have your device repaired by Vaporesso. Do not attempt to repair it by yourself as damage or personal injury may occur.

## WARNINGS

**This refillable electronic cigarette is intended for use with compatible e-liquid, which may contain nicotine. Nicotine is an addictive substance and it is not suitable or recommended to use in following cases:**

**1. This device is not suitable for:**

- Persons under the legal smoking age.
- Persons experiencing heart disease, stomach or duodenal ulcers, liver or kidney problems, long-term throat disease or difficult breathing due to bronchitis, emphysema or asthma.
- Persons with an overactive thyroid gland or experiencing pheochromocytoma (a tumour of the adrenal gland that can affect blood pressure).
- Persons taking certain medications like Theophylline, Ropinirole or Clozapine and etc..

**2. This device is not recommended for:**

- Non-smokers
- Pregnant or breastfeeding women

**3. You may experience the following results if you use nicotine containing e-liquid with this product. If it happens, please consult a healthcare professional and show them this leaflet if possible:**

- Feeling faint - Nausea - Dizziness - Headache - Coughing - Irritation of the mouth or throat
- Stomach discomfort - Hiccups - Nasal congestion - Vomition
- Chest palpitations/pain or an irregular heart rate

**This device should not be used by persons under the legal smoking age.**



@VaporessoEcig



@Vaporesso\_ecig



Vaporesso



support@vaporesso.com

[www.vaporesso.com](http://www.vaporesso.com)

Shenzhen Smoore Technology Limited

[www.buyV2Cigs.co.uk](http://www.buyV2Cigs.co.uk)