

**Buy
Proton Plex Kit**

Innokin Replacement Tanks

Innokin Replacement Coils

INNOKIN
PLEX
+
PROTON
QUICK START GUIDE



- 810 Wide Bore Tip
- Push Top Filling Cap
- 2ml/4ml Capacity
- Plexus Scion Coil
0.13Ω 80-110W
(Installed)
0.15Ω 60-110W
- 2 Slot Air Flow Control


Side Fire Panel
Power On/Off
Back (Menu Exit)

TFT Display
1.45" Full Color

Joystick Control
Menu
Selection
Adjust: Up/Down/
Left/Right

Micro USB

2X 18650
(Not Included)



QUICK REFERENCE GUIDE



FIRING PANEL



JOYSTICK (DIRECTIONAL + CLICK)

CLICK  3X Power ON/OFF

CLICK  3X
Access Menu: Coil Type/Modes, Settings
Click Joystick To Confirm Selection
Firing Panel To Exit To Main

HOLD   Vape Lock / Unlock

HOLD  
View 2nd Screen Info:
- Coil Resistance
- Battery Voltage
- Puff Count

HOLD  or  Wattage: Increase

WATTAGE MODE

HOLD  or  Wattage: Decrease

HOLD  T.C.: Increase

T.C. MODE

HOLD  T.C.: Decrease

HOLD  Pre-heat (T.C. Mode)

SETTINGS

Vape Cutoff: Select Vape Cutoff

Screen: Timeout, Dim Time, Brightness

C/F: Set Celsius - Fahrenheit

Color: Change Theme Color

Puff Count: Extended Puff Count

Firmware: Version / Reset / Update

SUPPORT

 facebook.com/Innokin.Technology

 instagram.com/innokintechnology

 twitter.com/innokintech


 reddit.com/r/innokin

 support@innokin.com


- 1 ATTACH TANK
- 2 SLIDE CAP OPEN AND TOP FILL



REFILLING THE TANK

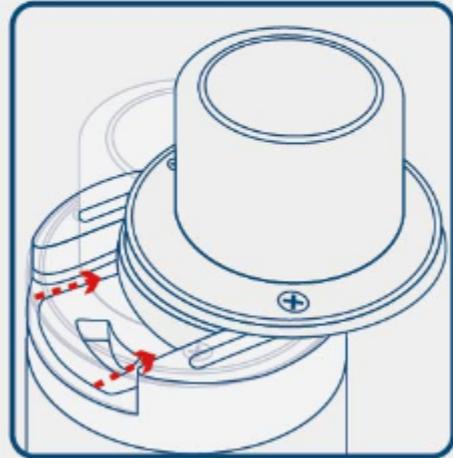

Push in the direction of the arrow, to slide open top cap

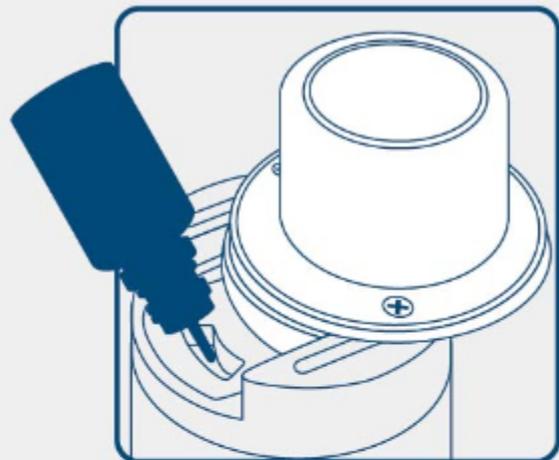

Carefully fill with e-liquid.

Please wait **5** minutes before vaping

- 3 OPEN BATTERY DOOR AND INSERT 2X 18650*.
*FOLLOW BATTERY ORIENTATION [+/-]


CONTINUED ON OTHER SIDE

4 POWER ON THE PROTON!




5 SELECT COIL OR MODE (USE JOYSTICK TO NAVIGATE AND SELECT).

6 CHECK COIL FOR RECOMMENDED WATTAGE / TEMPERATURE RANGE. START LOW AND INCREASE TO TASTE.

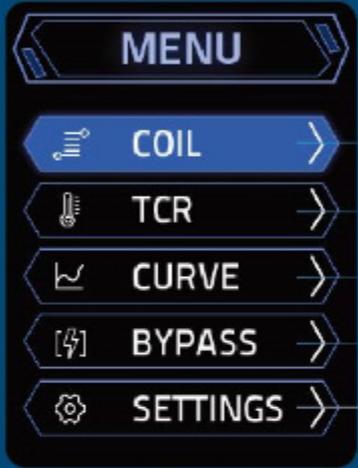



WATTAGE/SS316L/Ni200
 CUSTOM T.C. MATERIALS
 CUSTOM OUTPUT*
 OUTPUTS BATTERY VOLTAGE*
 *WATTAGE ONLY

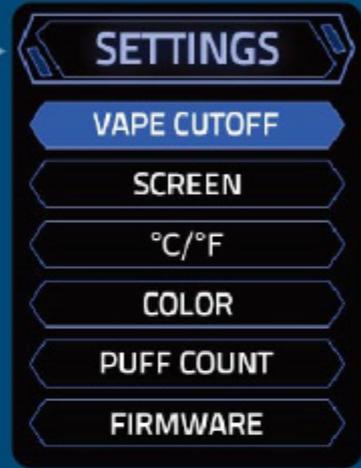

ADJUST ACCENT COLORS

 AND OTHER FUNCTIONS.

JOYSTICK TO SELECT. FIRE PANEL TO EXIT.

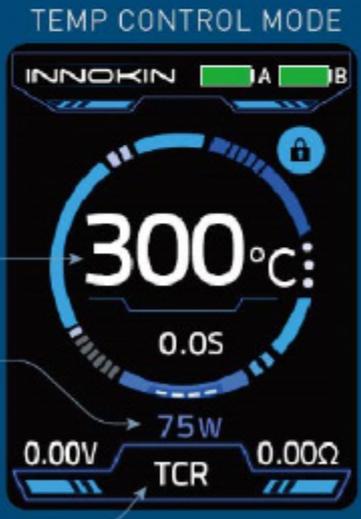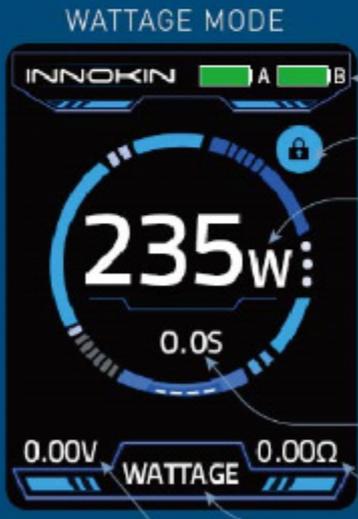

BATTERY LIFE 
 LOCK ICON
 WATTAGE [6-235W]
 TC: TEMPERATURE
 SS316L/Ti/Ni200
 150-315C/300-600F
 PRE-HEAT WATTAGE
 PUFF TIME / CUT-OFF
 COIL RESISTANCE Ω
 COIL TYPE (MODE)
 VOLTAGE

ENJOY THE VAPOR!

For full content, please refer to user manual on the product page at INNOKIN.COM